

Slimline - Ceiling Heating Panels

Features

- Suitable for use in approved wet areas
- Fit neatly into new or existing suspended ceilings. Can be surface mounted directly to new or existing ceilings with the brackets supplied
- Standard colour is white. Other colours available by special order
- 2 year warranty

Applications

- Offices
- Factories
- Warehouses
- Workshops
- Garages
- Schools
- Churches
- Colleges
- Cafes and restaurants
- Nursing homes
- Hostels, hotels and motels
- Community halls
- Shops
- Homes

COMFORTLINE®



Slimline panels are an efficient and effective radiant heating panel designed to be ceiling mounted.


The panels can be used in many applications. The CL750IN has a high IP rating making it suitable for wet areas and outdoor applications.

Slimline panels owe their superior level of heat emission due to the surface treatment on both the inner and outer heating surfaces. The treatment on the inner side is called “thermoquartz”. This material assures the highest absorption of the heat. On the outer side is a layer of “thermocystal” which ensures the highest efficiency of the emission.

Slimline - Ceiling Heating Panels

Technical Data

- Voltage: 240V
- Thermostat: Recommended
- Moisture Proof: IP 44 - IP 65
- Fixing: Surface or Recessed
- Height Range : 2.4m – 3.5m

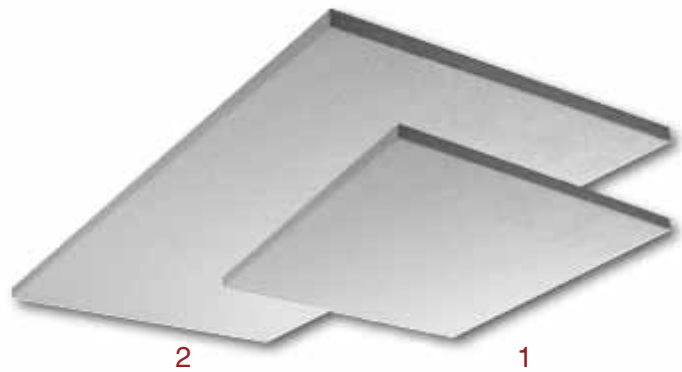

1) 350W
2) 750W

Stock Program

Code No.	No. of Panels	Voltage	Total Output
CL350	44	240V	350W
CL750	44	240V	750W
CL750IN	65	240V	750W

Installation Distances

Distance Criteria	CL350 - CL750
Minimum distance to wall	600mm
Minimum distance to floor	2,400mm
Minimum distance from heating surface	500mm

Dimensions

Code	Length	Width	Height	Weight
CL350	592mm	592mm	35mm	5.8kg
CL750	1,192mm	592mm	35mm	11.1kg
CL750IN	1,192mm	592mm	35mm	11.5kg